



Schema in plan, diametru Refulare SP2 - PEID PE100 SDR26 PN6  
D90 - L=7m

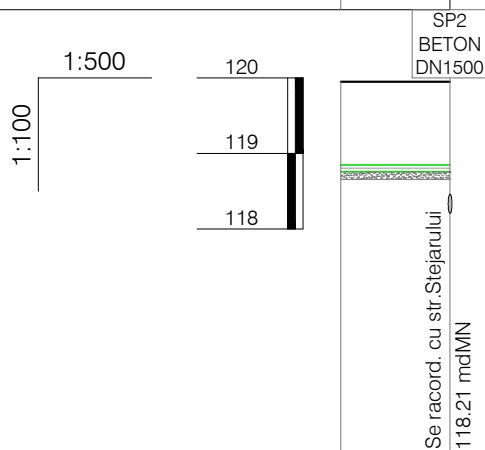

Panta [‰]	D90 - I=0.0‰	
Cota teren [mdMN]	119.95	119.95
Distanțe	Partiale [m]	7.23
	Cumulate [m]	0.00 7.23
Acoperire [m]	1.10	1.10
Cota inferior tub [mdMN]	118.76	118.76
Adancime sapatura [m]	1.29	1.29
Cota excavatie [mdMN]	118.66	118.66
Profil [km+m]	0+000	0+007

	NUMELE	SEM NAT	REFERAT	CERINTA
VERIFICATOR				
VERIFICATOR				
	<b>SPaKK GROUP SRL</b> str. Tudor Vladimirescu, nr. 1, ap. 8, Satu Mare, Jud. Satu Mare office@spakk.ro www.spakk.ro		<b>Investitia:</b> EXTINDERE REȚEA DE APA SI CANALIZARE, IN COMUNA VETIS, JUDETUL SATU MARE STRADA STEJARULUI - OAR <b>Beneficiar:</b> COMUNA VETIS	Faza: <b>P.T.</b>
	NUMELE	SEM NAT	SCARA: 1:100 1:500	<b>PROFIL LONGITUDINAL CONDUCTA DE REFULARE SP2 str.STEJARULUI, OAR</b>
SEF PROIECT	ing. KOVÁCS Szabolcs		DATA: 07/2019	
PROIECTAT	ing. MAKRANCZI Zoltán			PR. NR. 353/2019 <b>E.06</b>
DESENAT	ing. MAKRANCZI Zoltán			